


外形及安装尺寸 Mounting and overall dimensions

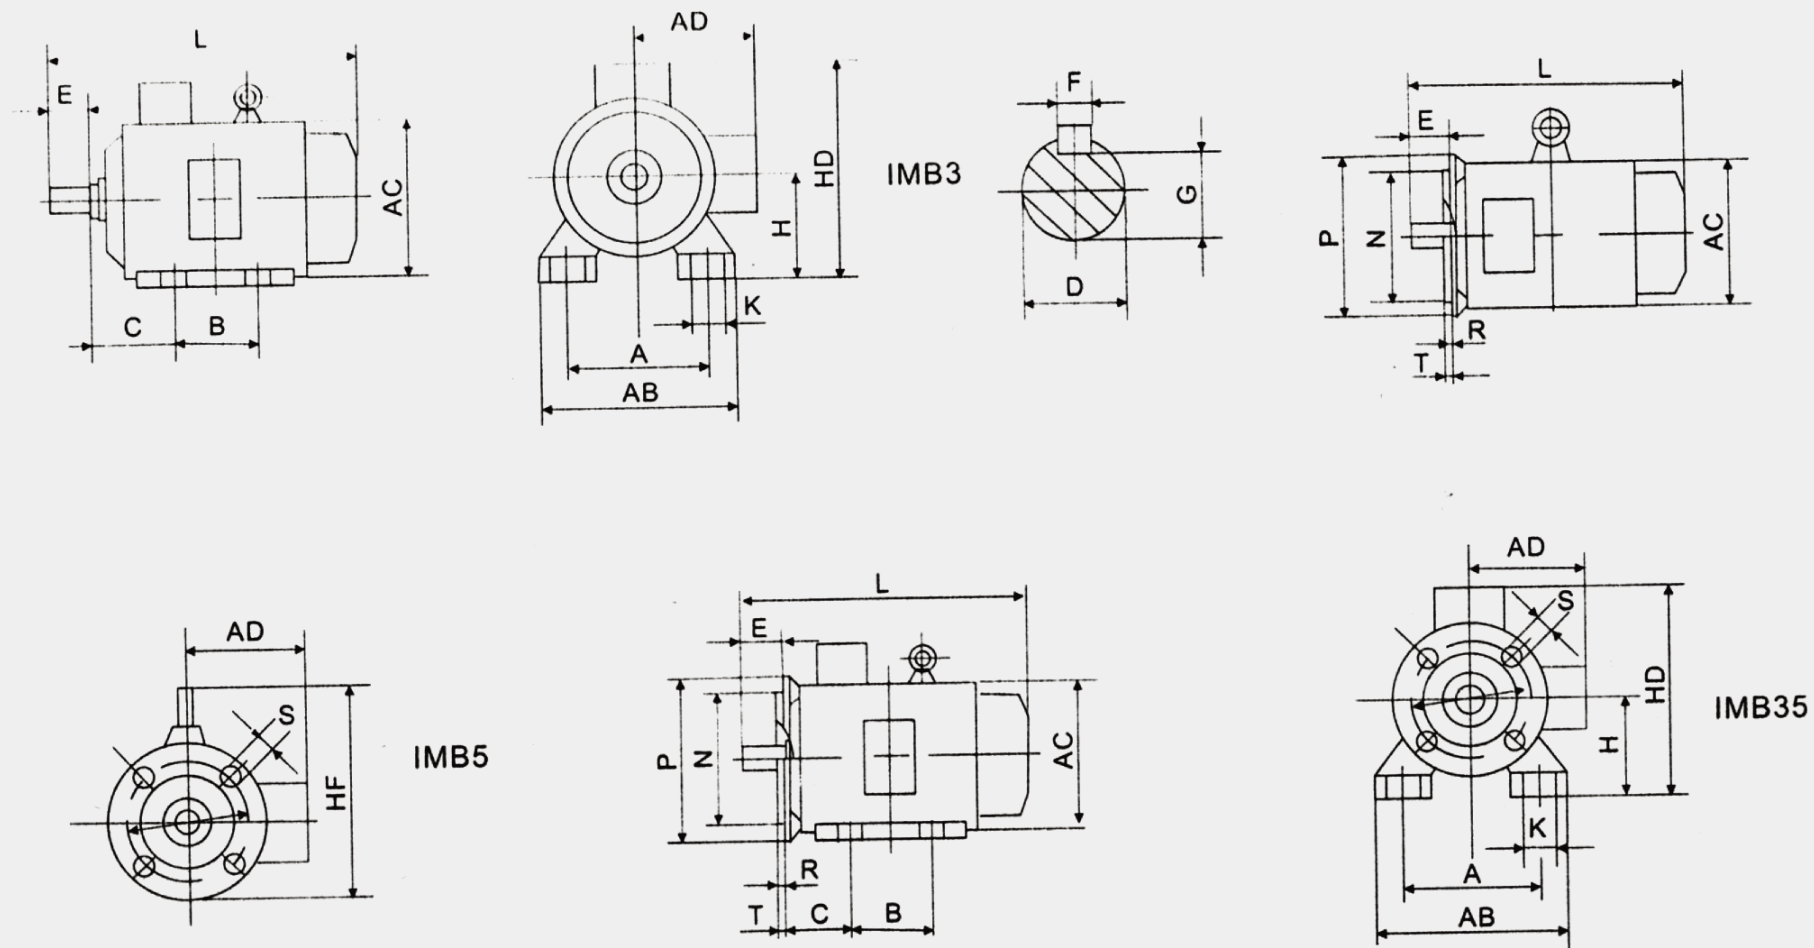

技术数据 Technical data

机座号 Frame Size	安装尺寸 Mounting Dimensions															外形尺寸 Overall Dimensions(mm)					
	A	B	C	D	E	F	G	H	K	M	N	P	R	S	T	AB	AC	AD	HD	HF	L
63	100	80	40	11	23	4	8.5	63	7	115	95	140	0	4-10	3	135	130	70	180	130	225
71	112	90	45	14	30	5	11	71	7	130	110	160	0	4-10	3.5	150	145	80	195	145	250
80	125	100	50	19	40	6	15.5	80	10	165	130	200	0	4-12	3.5	165	175	145	214	185	295
90S	140	100	56	24	50	8	20	90	10	165	130	200	0	4-12	3.5	180	195	155	250	195	315
90L	140	125	56	24	60	8	20	90	10	165	130	200	0	4-12	3.5	180	195	155	250	195	340
100L	160	140	63	28	60	8	24	100	12	215	180	250	0	4-15	4	205	215	180	270	245	385
112M	190	140	70	28	60	8	24	112	12	215	180	250	0	4-15	4	230	240	190	300	265	400
132S	216	140	89	38	80	10	33	132	12	265	230	300	0	4-15	4	270	275	210	345	315	470
132M	216	178	89	38	80	10	33	132	12	265	230	300	0	4-15	4	270	275	210	345	315	510
160M	254	210	108	42	110	12	37	160	15	300	250	350	0	8-19	5	320	330	255	420	385	615
160L	254	254	108	42	110	12	37	160	15	300	250	350	0	8-19	5	320	330	255	420	385	670
180M	279	241	121	48	110	14	42.5	180	15	300	250	350	0	8-19	5	355	380	280	455	430	700
180L	279	279	121	48	110	14	42.5	180	15	300	250	350	0	8-19	5	355	380	280	455	430	740
200L	318	305	133	55	110	16	49	200	19	350	300	400	0	8-19	5	395	420	420	505	480	770
225S	356	286	149	2P:55	2P:110	2P:16	2P:49	225	19	400	350	450	0	8-19	5	435	470	470	555	535	815
				60	140	18	53														
225M	356	311	149	2P:55	2P:110	2P:16	2P:49	225	19	400	350	450	0	8-19	5	435	470	470	555	535	2P:820
				60	140	18	53														845
250M	406	349	168	2P:60	140	18	2P:53	225	24	500	450	550	0	8-19	5	490	510	510	615	595	910
				65			58														

				65																	
280S	457	368	190	2P:65	140	2P:18	2P:58	280	24	500	450	550	0	8-19	5	550	580	580	680	650	985
				75		20	67.5														
280M	457	419	190	2P:65	140	2P:18	2P:58	280	24	500	450	550	0	8-19	5	550	580	580	680	650	1035
				75		20	67.5														
315S	508	406	216	2P:65	2P:140	2P:18	2P:58	315	28	600	550	660	0	8-24	6	635	645	645	845	—	2P:1160
				80	170	22	71														1270
315M	508	457	216	2P:65	2P:140	2P:18	2P:58	315	28	600	550	660	0	8-24	6	635	645	645	845	—	2P:1190
				80	170	22	71														1300
315L	508	508	216	2P:65	2P:140	2P:18	2P:58	315	28	600	550	660	0	8-24	6	635	645	645	845	—	2P:1190
				80	170	22	71														1300
355M	610	560	254	2P:75	2P:140	2P:20	2P:67.5	315	28	740	680	800	0	8-24	6	730	710	710	1010	—	2P:1500
				95	170	25	86														1530
355L	610	630	149	2P:75	2P:140	2P:20	2P:67.5	355	28	740	680	800	0	8-24	6	730	710	710	1010	—	2P:1500
				95	170	25	86														1530

技术数据 Technical data

型号 Type	功率 Output (kw)	转速 Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 Power Factory (COSΦ)	堵转转矩		堵转电流		最大转矩		重量 Weight (Kw)	噪声 Noise Lw dB(a)
							额定转矩	额定电流	额定转矩					
							Locked Rotor Torque	Locked Rotor Current	Breakdown Torque					
							Rated Torque	Rated Current	Rated Torque					
Y2-631-2	0.18	2800	0.5	380	65.0	0.80	2.2	5.5	2.2		14	61		
Y2-632-2	0.25	2800	0.7	380	68.0	0.81	2.2	5.5	2.2		14.5	61		
Y2-631-4	0.12	1400	0.4	380	57.0	0.72	2.1	4.4	2.2		13	52		
Y2-632-4	0.18	1400	0.6	380	60.0	0.73	2.1	4.4	2.2		13.5	52		

Y2-711-2	0.37	2800	1.0	380	70.0	0.81	2.2	6.1	2.2	15	64
Y2-712-2	0.55	2800	1.4	380	73.0	0.82	2.2	6.1	2.3	15.5	64
Y2-711-4	0.25	1400	0.8	380	65.0	0.74	2.1	5.2	2.2	14	55
Y2-712-4	0.37	1400	1.1	380	67.0	0.75	2.1	5.2	2.2	14.5	55
Y2-711-6	0.18	900	0.8	380	56.0	0.66	1.9	4.0	2.0	14	52
Y2-712-6	0.25	900	0.9	380	59.0	0.68	1.9	4.0	2.0	14.5	52
Y2-801-2	0.75	2825	1.8	380	75.0	0.83	2.2	6.1	2.3	15	67
Y2-802-2	1.1	2825	2.6	380	77.0	0.84	2.2	7.0	2.3	16	67
Y2-801-4	0.55	1390	1.6	380	71.0	0.75	2.4	5.2	2.3	15	58
Y2-802-4	0.75	1390	2.0	380	730	0.77	2.4	6.0	2.3	16	58
Y2-801-6	0.37	900	1.3	380	62.0	0.70	1.9	4.7	2.0	16	54
Y2-802-6	0.55	900	1.8	380	65.0	0.72	1.9	4.7	2.1	17	54
Y2-801-8	0.18	690	0.9	380	51.0	0.61	1.8	3.3	1.9	16	52
Y2-802-8	0.25	690	1.2	380	54.0	0.61	1.8	3.3	1.9	17	52
Y2-90S-2	1.5	2840	3.4	380	79.0	0.84	2.2	7.0	2.3	21	72
Y2-90L-2	2.2	2840	4.9	380	81.0	0.85	2.2	7.0	2.3	24	72
Y2-90S-4	1.1	1400	2.9	380	75.0	0.77	2.3	6.0	2.3	21	61
Y2-90L-4	1.5	1400	3.7	380	780	0.79	2.3	6.0	2.3	23	61
Y2-90S-6	0.75	910	2.3	380	69.0	0.72	2.0	5.5	2.1	22	57
Y2-90L-6	1.1	910	3.2	380	72.0	0.73	2.0	5.5	2.1	24	57
Y2-90S-8	0.37	690	1.5	380	62.0	0.61	1.8	4.0	1.9	24	56
Y2-90L-8	0.55	690	2.2	380	63.0	0.61	1.8	4.0	2.0	28	56
Y2-100L-2	3	2880	6.3	380	83.0	0.87	2.2	7.5	2.3	33	76
Y2-100L1-4	2.2	1420	5.2	380	80.0	0.81	2.3	7.0	2.3	33	64
Y2-100L2-4	3	1420	6.8	380	82.0	0.82	2.3	7.0	2.3	35	64
Y2-100L-6	1.5	940	3.9	380	76.0	0.76	2.0	5.5	2.1	32	61
Y2-1001-8	0.75	700	2.4	380	71.0	0.67	1.8	4.0	2.0	30	59

Y2-100L2-8	1.1	700	3.3	380	73.0	0.69	1.8	5.0	2.0	32	59
Y2-112M-2	4	2890	8.1	380	85.0	0.88	2.2	7.5	2.3	41	77
Y2-112M-4	4	1440	8.8	380	84.0	0.82	2.3	7.0	2.3	41	65
Y2-112M-6	2.2	940	5.6	380	79.0	0.76	2.1	6.5	2.1	41	65
Y2-112M-8	1.5	700	4.4	380	75.0	0.68	1.8	5.0	2.0	40	61
Y2-132S1-2	5.5	2900	11.0	380	86.0	0.88	2.2	7.5	2.3	63	80
Y2-132S2-2	7.5	2900	14.9	380	87.0	0.88	2.2	7.5	2.3	70	80
Y2-132S-4	5.5	1440	11.8	380	85.0	0.83	2.3	7.0	2.3	65	71

技术数据 Technical data

型号 Type	功率 Output (kw)	转速 Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 Power Factor (COS Φ)	堵转转矩	堵转电流	最大转矩	重量 Weight (Kw)	噪声 Noise Lw dB(a)
							额定转矩	额定电流	额定转矩		
							Locked Rotor Torque	Locked Rotor Current	Breakdown Torque		
							Rated Torque	Rated Current	Rated Torque		
Y2-132M-4	7.5	1440	15.6	380	87.0	0.84	2.3	7.0	2.3	76	71
Y2-132S-6	3	960	7.4	380	81.0	0.76	2.1	6.5	2.1	63	69
Y2-132M1-6	4	960	9.9	380	82.0	0.76	2.1	6.5	2.1	72	69
Y2-132M2-6	5.5	960	12.9	380	84.0	0.77	2.1	6.5	2.1	81	69
Y2-132S-8	2.2	710	6.0	380	78.0	0.71	1.8	6.0	2.0	64	64
Y2-132M-8	3	710	7.9	380	79.0	0.73	1.8	6.0	2.0	78	64
Y2-160M1-2	11	2930	21	380	88.0	0.89	2.2	7.5	2.3	110	86
Y2-160M2-2	15	2930	29	380	89.0	0.89	2.2	7.5	2.3	120	86
Y2-160L-2	18.5	2930	35	380	90.0	0.90	2.2	7.5	2.3	135	86
Y2-160M-4	11	1460	22	380	88.0	0.54	2.2	7.0	2.3	118	75
Y2-160L-4	15	1460	30	380	89.0	0.85	2.2	7.5	2.3	132	75
Y2-160M-6	7.5	970	16.9	380	86.0	0.77	2.0	6.5	2.1	118	73
Y2-160L-6	11	970	24	380	87.5	0.78	2.0	6.5	2.1	145	73

Y2-190M1-8	4	720	10.3	380	81.0	0.73	1.9	6.0	2.0	105	68
Y2-160M2-8	5.5	720	13.6	380	83.0	0.74	2.0	6.0	2.0	115	68
Y2-160L-8	7.5	720	17.8	380	85.5	0.75	2.0	6.0	2.0	145	68
Y2-180M-2	22	2940	41	380	90	0.90	2.0	7.5	2.3	165	89
Y2-180M-4	18.5	1470	36	380	90.5	0.86	2.2	7.5	2.3	164	76
Y2-180L-4	22	1470	43	380	91.0	0.86	2.2	7.5	2.3	182	76
Y2-180L-6	15	970	32	380	89.0	0.81	2.0	7.0	2.1	178	73
Y2-180L-8	11	730	25	380	87.5	0.76	2.0	6.6	2.0	160	70
Y2-200L1-2	30	2950	55	380	91.2	0.90	2.0	7.5	2.3	218	92
Y2-200L2-2	37	2950	68	380	92.0	0.90	2.0	7.5	2.3	230	92
Y2-200L-4	30	1480	58	380	92.0	0.86	2.2	7.2	2.3	245	79
Y2-200L1-6	18.5	970	39	380	90.0	0.81	2.1	7.0	2.1	200	76
Y2-200L2-6	22	970	45	380	90.0	0.83	2.1	7.0	2.1	228	76
Y2-200L-8	15	730	34	380	88.0	0.76	2.0	6.6	2.0	228	73
Y2-225M-2	45	2970	82	380	92.3	0.90	2.0	7.5	2.3	280	92
Y2-225S-4	37	1480	70	380	92.5	0.87	2.2	7.2	2.3	258	81
Y2-225M-4	45	1480	85	380	92.8	0.87	2.0	7.2	2.3	290	81
Y2-225M-6	30	980	59	380	91.5	0.84	2.0	7.0	2.1	265	76
Y2-225S-8	18.5	730	41	380	90.0	0.76	1.9	6.6	2.0	242	73
Y2-225M-8	22	730	47	380	90.5	0.78	1.9	6.6	2.0	265	73
Y2-250M-2	55	2970	100	380	92.5	0.90	2.0	7.5	2.3	365	93
Y2-225M-4	55	1480	103	380	93.0	0.87	2.2	7.2	2.3	388	83
Y2-225M-6	37	980	71	380	92.0	0.86	2.1	7.0	2.1	370	78
Y2-225M-8	30	730	63	380	91.0	0.79	1.9	6.6	2.0	368	75
Y2-280S-2	75	2970	134	380	93	0.90	2.2	6.5	2.3	495	94
Y2-280M-2	90	2970	160	380	93.8	0.91	2.0	7.5	2.3	565	94

技术数据 Technical date

型号 Type	功率 Output (kw)	转速 Speed (r/min)	电流 Current (A)	电压 Voltage (V)	效率 Efficiency (%)	功率因数 Power Factory (COS Φ)	堵转转矩	堵转电流	最大转矩	重量 Weight (Kw)	噪声 Noise Lw dB(a)
							额定转矩	额定电流	额定转矩		
							Locked Rotor Torque	Locked Rotor Current	Breakdown Torque		
Rated Torque	Rated Current	Rated Torque									
Y2-280S-4	75	1480	140	380	93.8	0.87	2.2	7.2	2.3	510	86
Y2-280M-4	90	1485	167	380	94.2	0.87	2.2	7.2	2.3	606	86
Y2-280S-6	45	980	86	380	92.5	0.86	2.1	7.0	2.0	490	80
Y2-280M-6	55	980	105	380	92.8	0.86	2.1	7.0	2.0	540	80
Y2-280S-8	37	730	78	380	91.5	0.79	1.9	6.6	2.0	472	76
Y2-280M-8	45	740	94	380	92.0	0.79	1.9	6.6	2.0	538	76
Y2-315S-2	110	2980	195	380	94.0	0.91	1.8	7.1	2.2	890	96
Y2-315M-2	132	2980	233	380	94.5	0.91	1.8	7.1	2.2	980	96
Y2-315L1-2	160	2980	279	380	94.6	0.92	1.8	7.1	2.2	1055	99
Y2-315L2-2	200	2980	348	380	94.8	0.92	1.8	7.1	2.2	1115	99
Y2-315S-4	110	1485	201	380	94.5	0.88	2.1	6.9	2.0	910	93
Y2-315M-4	132	1485	240	380	94.8	0.88	2.1	6.9	2.0	1000	93
Y2-315L1-4	160	1485	288	380	94.9	0.89	2.1	6.9	2.0	1055	97
Y2-315L2-4	200	1485	359	380	95.0	0.89	2.1	6.9	2.0	1128	97
Y2-315S-6	75	980	142	380	93.5	0.86	2.0	7.0	2.0	900	85
Y2-315M-6	90	985	170	380	93.8	0.86	2.0	7.0	2.0	980	85
Y2-315L1-6	110	985	207	380	94.0	0.86	2.0	6.7	2.0	1045	85
Y2-315L2-6	132	985	245	380	94.2	0.87	2.0	6.7	2.0	1100	85
Y2-315S-8	55	740	111	380	92.8	0.81	1.8	6.6	2.0	900	82
Y2-315M-8	75	740	151	380	93.0	0.81	1.8	6.6	2.0	1000	82
Y2-315L1-8	90	740	178	380	93.8	0.82	1.8	6.6	2.0	1055	82

Y2-315L2-8	110	740	217	380	94.0	0.82	1.8	6.4	2.0	1118	82
Y2-315S-10	45	590	100	380	91.5	0.75	1.5	6.2	2.0	818	82
Y2-315M-10	55	590	121	380	92.0	0.75	1.5	6.2	2.2	929	82
Y2-315L1-10	75	590	162	380	92.5	0.76	1.5	6.2	2.2	1080	82
Y2-315L2-10	90	590	191	380	93.0	0.77	1.5	6.2	2.2	1200	82
Y2-355M-2	250	2985	433	380	95.3	0.92	1.6	7.1	2.2	1900	103
Y2-355L-2	315	2985	544	380	95.6	0.92	1.6	7.1	2.2	2300	103
Y2-355M-4	250	1490	443	380	95.3	0.90	2.1	6.9	2.2	1700	101
Y2-355L-4	315	1490	556	380	95.6	0.90	2.1	6.9	2.2	1900	101
Y2-355M1-6	160	990	292	380	94.5	0.88	1.9	6.7	2.0	1550	92
Y2-355M2-6	200	990	365	380	94.7	0.88	1.9	6.7	2.0	1600	92
Y2-355L-6	250	990	455	380	94.9	0.88	1.9	6.7	2.0	1700	92
Y2-355M1-8	132	745	261	380	93.7	0.82	1.8	6.4	2.0	2000	90
Y2-355M2-8	160	745	315	380	94.2	0.82	1.8	6.4	2.0	2150	90
Y2-355L-8	200	745	387	380	94.5	0.83	1.8	6.4	2.0	2250	90
Y2-355M1-10	110	595	230	380	93.2	0.78	1.3	6.0	2.0	1800	90
Y2-355M2-10	132	595	275	380	93.5	0.78	1.3	6.0	2.0	2000	90
Y2-355L-10	160	595	333	380	93.5	0.78	1.3	6.0	2.0	2500	90