


配硬齿面减速机专用电机外形尺寸

Dimension of Special Motor for Speed-Reducing Machine

外形及安装尺寸 Mounting and overall dimensions

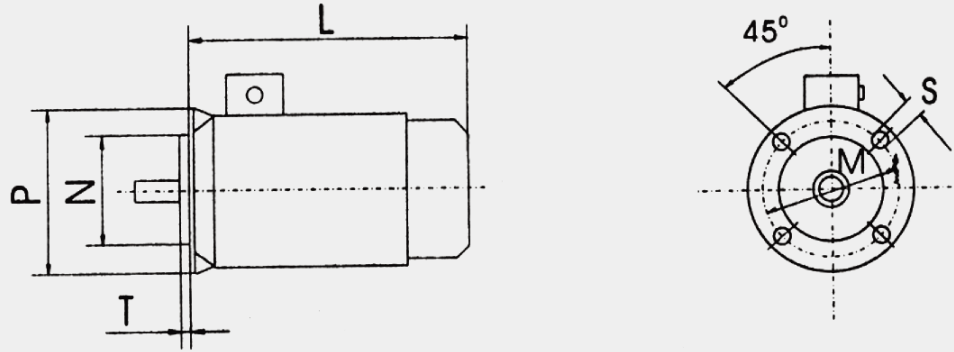

技术数据 Technical data

型号 Type	尺寸 Dimension(mm)						凸缘号 孔数 Number of poles on the flange
	P	M	N	S	T	L	
71	120	100	80	10	3	245	
	160	130	110				
	140	100	80	236			
	200	165	130	12	3.5	233	
714	120	100	80	10	3	257	
	160	130	110				
	140	100	80	245			
	200	165	130	12	3.5	245	
80	120	100	80	10	3	236	
	160	165	110				
	200	100	130	12	3.5	248	
	140	130	80	10	3	245	
	250	215	180				

技术数据 Technical data

型号 Type	尺寸 Dimension(mm)						凸缘号 孔数 Number of poles on the flange
	P	M	N	S	T	L	
100	160	130	110	10	3	350	
	200	165	130	12	3.5		
	250	215	180	15	4	315	
	300	265	230				
	350	300	250	19	5	318	
112	160	130	110	10	3	380	
	200	165	130	12	3.5		
	250	215	180	15	4	334	
	300	265	230				
	350	300	250	19	5		
	160	130	110	10	3	425	
	200	165	130	12	.5		
	250	215	180				

90S	300	265	230	15	4	246
	120	100	80	10	3	304
	160	130	110			
	200	165	130	12	3.5	
	140	100	80	10	3	264
	250	215	180	15	4	280
300	265	230				
90L	120	100	80	10	3	328
	160	130	110			
	200	165	130	12	3.5	
	140	100	80	10	3	301
	250	215	180	15	4	304
	300	265	230			
100	120	100	80	10	3	340
	140	100	80			358

132S	300	265	230	15	4	386
	350	300	250	19	5	
	400	350	300			388
	450	400	350			
132M	160	130	110	10	3	461
	200	165	130	12	3.5	
	250	215	180	15	4	
	300	265	230			
	350	300	250	19	5	422
	400	350	300			424
450	400	350				
160M	200	165	130	12	3.5	524
	250	215	180	15	4	
	300	265	230			
	350	300	250	19	5	504

## 技术数据 Technical data

型号 Type	尺寸 Dimension(mm)						凸缘号 孔数 Number of poles on the flange
	P	M	N	S	T	L	
160M	400	350	300	19	5	475	
	450	400	350			567	
	550	500	400				
	200	165	130	12	3.5	547	
	250	215	180	15	4		
	300	265	230				

型号 Type	尺寸 Dimension(mm)						凸缘号 孔数 Number of poles on the flange
	P	M	N	S	T	L	
180L	450	400	350				
	550	500	450				
200L	300	265	230				
	350	300	250				
	400	350	300				
	450	400	350				

160L	350	300	250	19	5	519
	400	350	300			602
	450	400	350			
	550	500	450			
180M	250	215	180	15	4	583
	300	265	230	19	5	555
	350	300	250			583
	400	350	300			635
	450	400	350			
	550	500	450			
180L	250	215	180	15	4	616
	300	265	230	19	5	588
	350	300	250			
	400	350	300			

4

	550	500	450	19	15	
225S	350	300	250			
	400	350	300			
	450	400	350			
	550	500	450			
225M	350	300	250			
	400	350	300			
	450	400	350			
	550	500	450			
250M	400	350	300			
	450	400	350			
	550	500	450			
280S	550	500	450			
280M	550	500	450			